



Features

- Ø22.5mm dia cutout
- 4 LED Bright Luminance
- Red Colors Available
- 1 Year Warranty

TECHNICAL SPECIFICATION

Rated Frequency	50Hz
Operating Frequency	-20% to +10% of rated voltage
Rated Working Current	≤ 20mA max
Voltage Fluctuation Range	+20% (above 110V)
Insulation Resistance	U _i ≤ 60V5MΩ
Withstand Voltage	2.5KV (AC effective value) 1min.
Continues Working Life	≥ 3,0000Hrs
Brightness	≤ 100cd/m ²


OTHER SPECIFICATION

Degree of Protection	IP20
Confirming of Standard	IEC60947-5-1, EN60947-5-1

ORDER CODE

MODEL	FREQUENCY	COLOUR
LF22-50H-R	50Hz	● RED

INTERNAL WIRING DIAGRAM

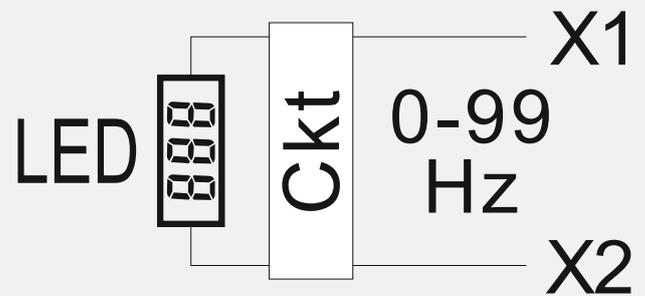

DIMENSIONS

